


Poignée tournante bombée

11-04

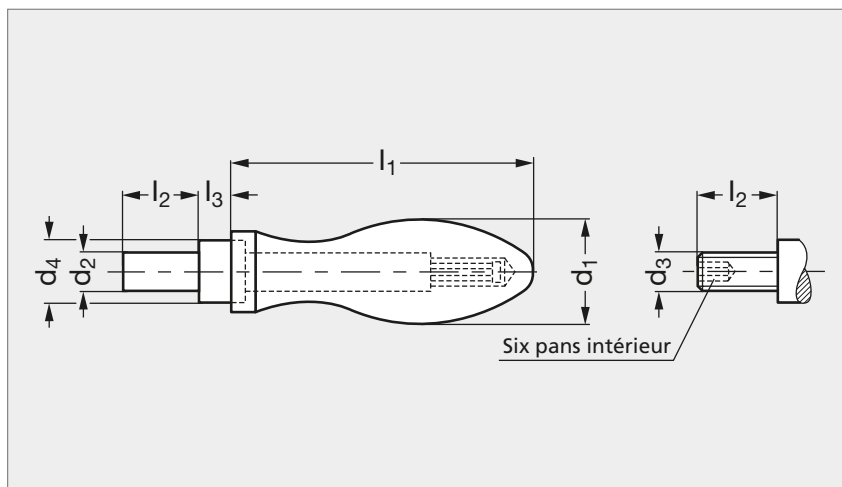

MATIÈRE

- Corps en acier tourné zingué, aluminium tourné poli ou technopolymère noir mat.
- Insert en acier zingué.

UTILISATION

- Température d'emploi jusqu'à 110 °C pour le technopolymère.

BOUT LISSE

Acier	Aluminium	Technopolymère	d ₁	d ₂	d ₃	d ₄	l ₁	l ₂	l ₃	6 pans	Acier	Aluminium	Technopolymère
11-041-16	11-042-16	11-043-16	16	7	M 6	10	49	11	5,5	3	11-044-16	11-045-16	11-046-16
11-041-20	11-042-20	11-043-20	20	8	M 8	13	61	13	6	4	11-044-20	11-045-20	11-046-20
11-041-25	11-042-25	11-043-25	25	10	M 10	16	75	14	8	5	11-044-25	11-045-25	11-046-25
			28	10	M 12	18	85	21	10,5	6	11-044-28		
11-041-32	11-042-32	11-043-32	32	13	M 12	20	95	21	10,5	6	11-044-32	11-045-32	11-046-32
11-041-36	11-042-36		36	16	M 16	22	106	26	11	8	11-044-36	11-045-36	

BOUT FILETÉ

Exemple
de commande

Référence
11-041-16