


Vis moletée bakélite à tige filetée acier ou inox

16-10

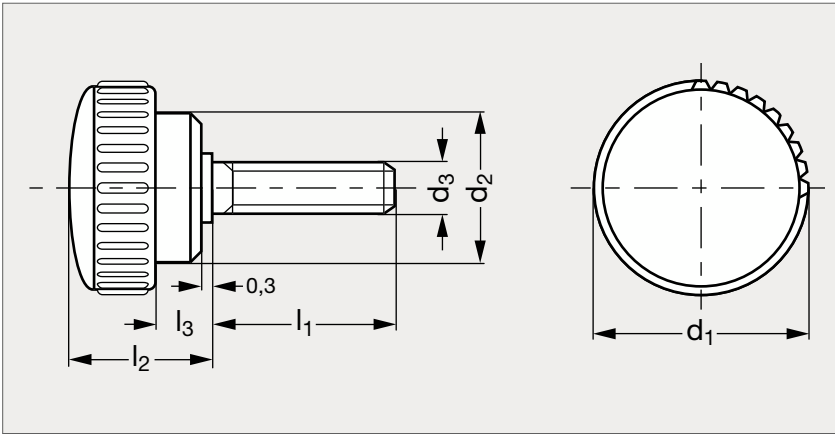

MATIÈRE

- Thermodurcissable noir, finition brillante.
- Tige filetée en acier zingué brillant ou en inox (AFNOR Z 8 CNF 18-09, Werk 1.4305, AISI 303).

Acier	d ₁	d ₂	d ₃	l ₁	l ₂	l ₃	Inox
16-100-15	15	11	M3	6	11	2	16-105-15
16-100-15	15	11	M3	10	11	2	16-105-15
16-100-15	15	11	M3	16	11	2	16-105-15
16-100-15	15	11	M4	6	11	2	16-105-15
16-100-15	15	11	M4	10	11	2	16-105-15
16-100-15	15	11	M4	16	11	2	16-105-15
16-100-15	15	11	M5	10	11	2	16-105-15
16-100-15	15	11	M5	16	11	2	16-105-15
16-100-15	15	11	M5	25	11	2	16-105-15
16-100-18	18	13	M5	10	12	3	16-105-18
16-100-18	18	13	M5	16	12	3	16-105-18
16-100-18	18	13	M5	25	12	3	16-105-18
16-100-18	18	13	M5	40	12	3	
16-100-22	22	15	M6	10	14	4	16-105-22
16-100-22	22	15	M6	16	14	4	16-105-22

Acier	d ₁	d ₂	d ₃	l ₁	l ₂	l ₃	Inox
16-100-22	22	15	M 6	20	14	4	16-105-22
16-100-22	22	15	M 6	25	14	4	16-105-22
16-100-22	22	15	M 6	30	14	4	16-105-22
16-100-22	22	15	M 6	40	14	4	
16-100-26	26	19	M 6	16	18	6	16-105-26
16-100-26	26	19	M 6	25	18	6	16-105-26
16-100-26	26	19	M 8	16	18	6	
16-100-26	26	19	M 8	25	18	6	
16-100-31	31	24	M 8	16	18	6	16-100-31
16-100-31	31	24	M 8	25	18	6	16-100-31
16-100-31	31	24	M 8	40	18	6	16-100-31
16-100-36	36	27	M 8	25	23	8	
16-100-36	36	27	M 8	40	23	8	
16-100-40	40	29	M10	30	26	10	
16-100-50	50	36	M10	40	32	12	

Exemple
de commande

Référence - d₃ - l₁

16-100-15-3-6

elesa

composants.emile-maurin.fr

EMILE MAURIN
ELEMENTS STANDARD MECANIQUE