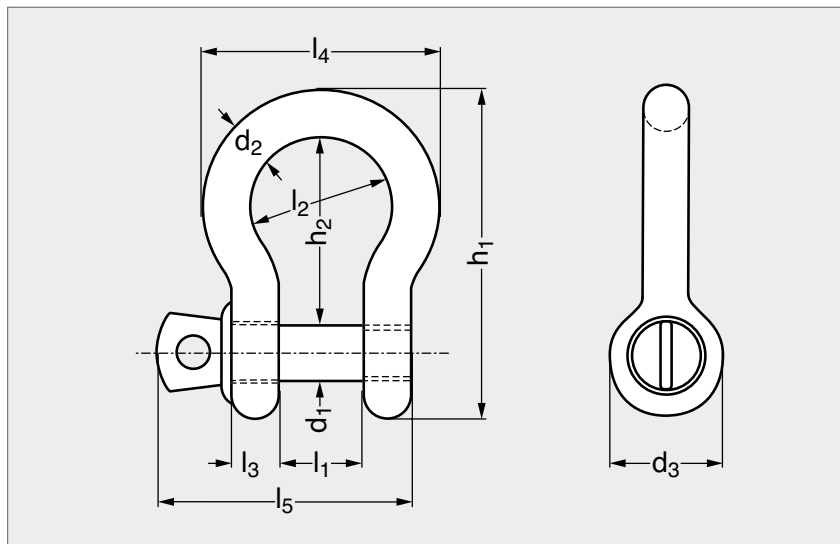


Manille lyre haute résistance, grade 80

18-165

MATIÈRE

- Acier allié, grade 80, trempé et revenu, galvanisé à chaud.
- La charge de rupture est obtenue en multipliant la CMU par le coefficient de sécurité 5.

UTILISATION

- Température d'emploi de - 20 °C à + 200 °C.

PRODUITS ASSOCIÉS



	d ₁	d ₂	d ₃	l ₁	l ₂	l ₃	l ₄	l ₅	h ₁	h ₂	CMU (t)
18-1651-16	16	13,5	34	22	32	13	59	73	90	51	3,3
18-1651-19	19	16	40	27	43	16	75	89	110	64	5
18-1651-22	22	19	46	31	51	19	89	103	129	76	7
18-1651-25	25	22	52	36	58	22	102	119	144	83	9,5
18-1651-28	28	25	59	43	68	25	118	137	164	95	12,5
18-1651-32	32	28	67	47	75	28	131	153	186	108	15
18-1651-35	35	32	73	51	83	32	147	170	201	115	18
18-1651-38	38	35	79	57	92	35	162	186	227	133	21
18-1651-42	42	38	88	60	99	38	175	203	249	146	30
18-1651-50	50	45	104	74	126	45	216	243	300	178	40
18-1651-57	57	57	119	83	138	57	252	286	341	197	55
18-1651-70	70	70	145	105	180	70	320	354	437	260	85

Référence

18-1651-16Exemple
de commande