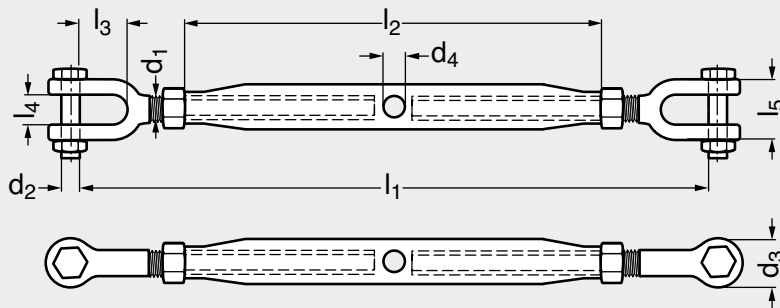


Ridoir 2 chapes

18-355


MATIÈRE

- Acier doux, galvanisé.
- La charge de rupture est obtenue en multipliant la CMU par le coefficient de sécurité 5.

PRODUIT ASSOCIÉ



Plaquette d'identification
18-98

	d ₁	d ₂	d ₃	d ₄	l ₁ min.	l ₁ max.	l ₂	l ₃	l ₄	l ₅	Course	CMU (t)	Poids (kg)
18-3551- 6	6	5	13	6	170	250	100	19	7	20	80	0,2	0,15
18-3551- 8	8	6	14	8	199	279	108	25	9	24	80	0,32	0,26
18-3551-10	10	8	19	8	222	312	125	26	10,5	28	90	0,5	0,45
18-3551-12	12	10	23	10	315	470	195	32	13	34	155	0,7	0,85
18-3551-16	16	12	29	11	388	568	230	39	18	42	180	1,2	1,51
18-3551-20	20	16	33	12	449	654	270	46	20	51	205	1,5	2,62
18-3551-22	22	20	38	12	490	715	295	55	25	55	225	2,2	3,94
18-3551-24	24	22	46	12	538	793	325	63	30	70	255	3,2	5,16
18-3551-33	33	30	60	14	680	965	370	85	38	82	285	4,8	11,6
18-3551-39	39	33	76	15	707	1002	400	86	45	85	295	6	14,2
18-3551-45	45	39	85	16	761	1011	400	105	50	94	250	8,5	20,8
18-3551-48	48	45	92	16	780	1005	400	119	58	98	225	11	24

Exemple
de commande

Référence

18-3551-6