


Accouplement à embase de fixation

31-81

Tige filetée

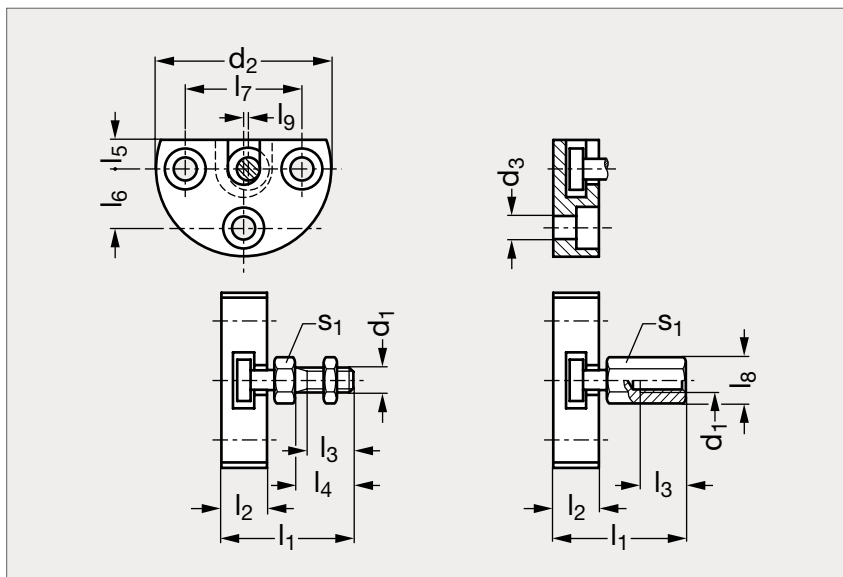

Avec écrou

MATIÈRE

- Acier traité phosphaté.

F_1 (N) = force de traction et de pression admissible maximum.

PRODUITS ASSOCIÉS



Accouplement à
compression radiale 31-80
Page 1545



Accouplement à
compensation 31-82
Page 1547

Tige filetée	l ₁	l ₂	l ₃ min.	l ₄	l ₅	l ₆	l ₇	l ₈	l ₉ max.	d ₁		d ₂	d ₃	s ₁	F ₁ max. (N)	Écrou
31-811-30	30,5	11	11	14	7	14	28	11	0,6	M 6		42	5,5	10	2500	31-813-30
31-811-35	35,5	13	13,5	17	8	16	32	14,5	0,7	M 8		48	6,5	13	4500	31-813-35
31-811-43	43	16	16	20	9	17	34	19	0,7	M10	M10x1,25	50	6,5	17	6500	31-813-43
31-811-53	53	20,5	21	25	10	19	38	21	0,8	M12	M12x1,25	55	6,5	19	10000	31-813-53
31-811-64	64	23	25	30	13	22,5	45	27	1	M16	M16x1,5	65	9	24	18000	31-813-64
31-811-74	74	26	29	35	17	28	56	34	1	M20	M20x1,5	80	11	30	30000	31-813-74

Référence - d_1

31-811-30-6

Exemple
de commande