


Poussoir à ressort à béton, 6 pans creux, long

32-41



Ressort normal

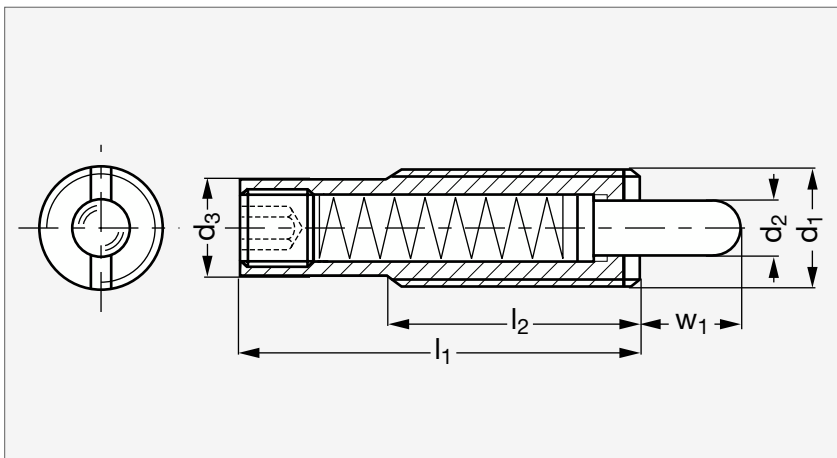

Ressort puissant

MATIÈRE

- Acier bruni.
- Béton cimenté trempé.
- Frein filet polyamide.

ACIER

Ressort normal	Ressort puissant	d ₁	d ₂	d ₃	l ₁	l ₂	w ₁	Élasticité ressort (N)					Ressort normal	Ressort puissant
								6 pans	Normal		Puissant			
								Début	Fin	Début	Fin			
32-411-10	32-413-10	M10	4	7,8	35	25	8	3	6	16	12	22	32-415-10	32-417-10
32-411-12	32-413-12	M12	5,5	9,5	43	35	10	4	4	18	7	46	32-415-12	32-417-12
32-411-16	32-413-16	M16	8	13,4	48	35	10	6	7	24	10	43	32-415-16	32-417-16
32-411-16	32-413-16	M16	8	13,4	58	35	15	6	9	33	10	57	32-415-16	32-417-16
32-411-16	32-413-16	M16	8	13,4	58	35	20	6	4	23			32-415-16	
32-411-16	32-413-16	M16	8	13,4	83	35	20	6			18	72		32-417-16
32-411-16	32-413-16	M16	8	13,4	98	35	25	6	13	41	20	70	32-415-16	32-417-16
32-411-16	32-413-16	M16	8	13,4	98	35	30	6	13	47	20	80	32-415-16	32-417-16
32-411-16	32-413-16	M16	8	13,4	148	35	40	6	13	63	21	113	32-415-16	32-417-16
32-411-16	32-413-16	M16	8	13,4	148	35	50	6	7	43	13	75	32-415-16	32-417-16
32-411-16	32-413-16	M24	10	19,6	60	45	15	8	14	87	40	192	32-415-16	32-417-16

INOX

Exemple
de commandeRéférence - w₁

32-411-10-8