


Pied acier, à tige filetée

35-290



1 trou, M8 à M12

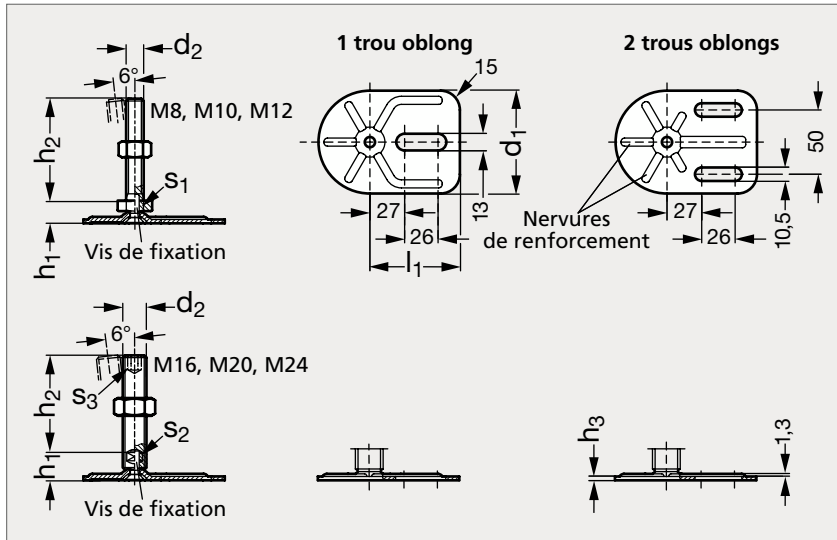

1 trou, M16 à M24



2 trous, M8 à M12



2 trous, M16 à M24

MATIÈRE

- Base et écrou en acier zingué, passivé bleu.
- Tige filetée inclinable en acier zingué, passivé bleu.

1 TROU OBLONG

												2 TROUS OBLONGS				
Avec écrou	Sans écrou	d ₁	d ₂	h ₁	h ₂				h ₃	l ₁	s ₁	s ₂	s ₃	Charge statique (kN)	Avec écrou	Sans écrou
35-2901-80	35-2902-80	80	M 8	12	40	50	63		3	70	17		8	35-2903-80	35-2904-80	
35-2901-80	35-2902-80	80	M10	12	50	60	80	100	3	70	17		10	35-2903-80	35-2904-80	
35-2901-80	35-2902-80	80	M12	12	60	80	100	125	3	70	17		12	35-2903-80	35-2904-80	
35-2901-80	35-2902-80	80	M16	18	75	100	125	150	200	3	70	12	8	35-2903-80	35-2904-80	
35-2901-80	35-2902-80	80	M20	19	75	100	125	150	200	3	70	15	10	35-2903-80	35-2904-80	
35-2901-80	35-2902-80	80	M24	22	100	125	150	200	3	70	19	12	16	35-2903-80	35-2904-80	

Référence - d₂ - h₂

35-2901-80-8-40

Exemple
de commande