


# Charnière longue inox 304, non percée

37-81

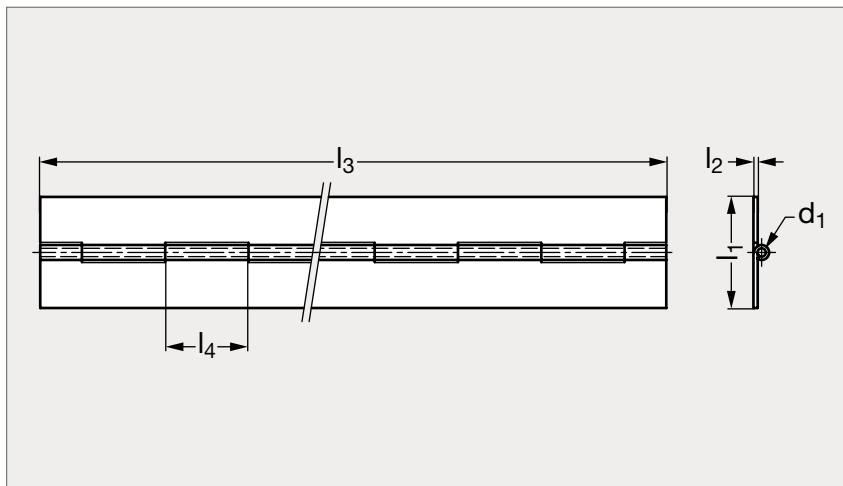

## MATIÈRE

- Inox A2 (AFNOR Z 6 CN 18-09, Werk 1.4301, AISI 304).
- Angle d'ouverture à 270°.

## SUR DEMANDE

- Longueurs spéciales.
- Perçages spéciaux.

## PRODUITS ASSOCIÉS



Joint d'étanchéité 19-180  
Page 642



Joint de protection 19-184  
Page 644



Verrous et loquets  
Page 570

# Charnière longue inox 304, non percée

**37-81**

	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	d <sub>1</sub>
37-815-20	20	0,8	2040	15	2
37-815-25	25	0,8	1020	15	2
37-815-25	25	0,8	2040	15	2
37-815-25	25	1	1800	15	2
37-815-25	25	1	2040	15	2
37-815-30	30	0,8	1020	15	2
37-815-30	30	0,8	2040	30	2
37-815-30	30	1	1800	15	2
37-815-30	30	1	2040	15	2
37-815-30	30	1,5	2000	30	4
37-815-30	30	2	2000	25	6
37-815-32	32	1,2	1800	30	3
37-815-32	32	1,5	1950	12,5	3
37-815-40	40	1,2	1020	30	3
37-815-40	40	1,2	1800	30	3
37-815-40	40	1,2	2040	30	3
37-815-40	40	1,5	1950	12,5	3
37-815-40	40	1,5	2040	15	4
37-815-40	40	2	2040	30	6

	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	d <sub>1</sub>
37-815- 50	50	1,2	1020	30	3
37-815- 50	50	1,2	1800	30	3
37-815- 50	50	1,2	2040	30	3
37-815- 50	50	1,5	1800	15	4
37-815- 50	50	1,5	1950	12,5	3
37-815- 50	50	2	2000	25	4
37-815- 57	57	1,5	2160	15	4
37-815- 60	60	2	1020	30	6
37-815- 60	60	2	2040	30	6
37-815- 63	63	1,5	1800	15	4
37-815- 70	70	1,5	1800	15	4
37-815- 70	70	2	2040	30	6
37-815- 76	76	1,5	2160	15	4
37-815- 80	80	1,5	1950	12,5	3
37-815- 80	80	3	1000	40	6
37-815- 80	80	3	2000	40	6
37-815-1001	100	3	2000	40	6
37-815- 100	100	3	2000	40	10
37-815- 120	120	2	2100	30	6

Exemple  
de commandeRéférence - l<sub>2</sub> - l<sub>3</sub>**37-815-20-0,8-2040**

composants.emile-maurin.fr

**EMILE MAURIN**  
ELEMENTS STANDARD MECANIQUE