


# Loquet à compression à bouton étoile

19-136

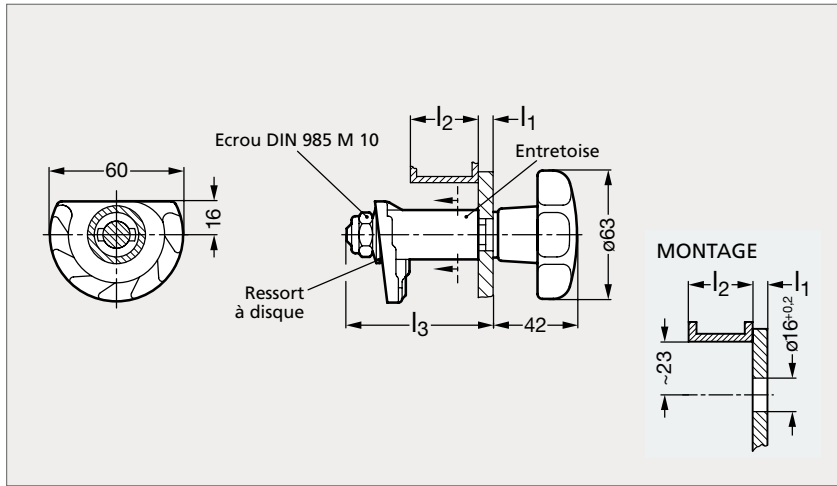

## MATIÈRE

- Acier zingué, passivé bleu.
- Bouton en technopolymère noir mat (modèle 15-27).

## PRODUITS ASSOCIÉS



Bouton	$l_1$		$l_2$ min-max														
	min	max	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-3	1,5	3	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-4	3	4,5	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-6	4,5	6	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-7	6	7,5	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-9	7,5	9	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-10	9	10,5	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51
19-1360-12	10,5	12	0-09	3-12	6-15	9-18	12-21	15-24	18-28	21-30	24-33	27-36	30-39	33-42	36-45	39-48	42-51

$l_1$ max + $l_2$ max	< 13,5	< 18	< 22,5	< 27	< 31,5	< 36	< 40,5	< 45	< 49,5	< 54	< 58,5	< 63
$l_3$	31	35,5	40	44,5	49	53,5	58	62,5	67	71,5	76	80,5

Exemple  
de commande

Référence -  $l_2$

**19-1360-3-9**

composants.emile-maurin.fr

**EMILE MAURIN**  
ELEMENTS STANDARD MECANIQUE

SÉRIE 19