


Vis moletée plate, acier ou inox, imperdable

16-04

Inox

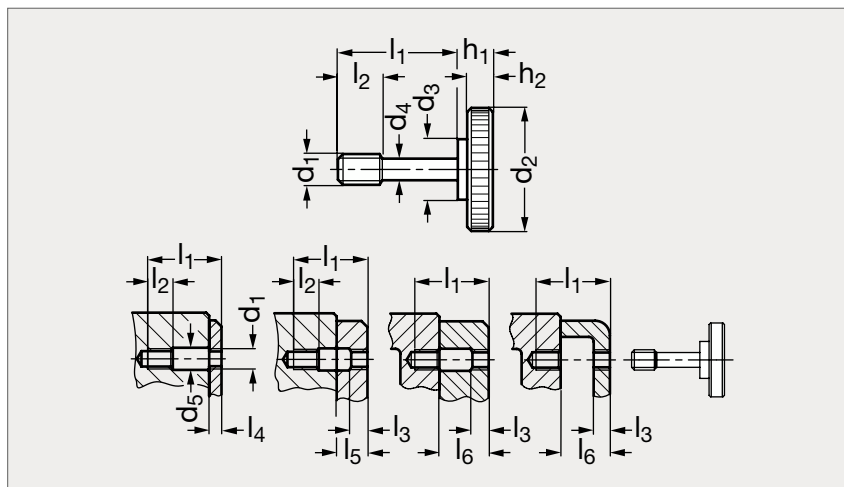

Acier

MATIÈRE

- Acier résistance 5.8 tourné bruni ou inox (AFNOR Z 8 CNF 18-09, Werk 1.4305, AISI 303).

Vis moletée

plate, acier ou inox, imperdable

16-04

Acier	d ₁	d ₂	d ₃	d ₄ ⁰ _{-0,2}	d ₅	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	h ₁	h ₂	Inox
16-041-4	M4	16	8	3,2	4,5	15	5	2	2 - 4	4- 8	8 -10	5,5	3,5	16-045-4
16-041-4	M4	16	8	3,2	4,5	17	5	2	4 - 6	6-10	10 -12	5,5	3,5	16-045-4
16-041-4	M4	16	8	3,2	4,5	19	5	2	6 - 8	8-12	12 -14	5,5	3,5	16-045-4
16-041-4	M4	16	8	3,2	4,5	21	5	2	8 -10	10-14	14 -16	5,5	3,5	16-045-4
16-041-5	M5	20	10	4	5,5	18	6	2,5	2,5- 4	4-10,5	10,5-12	6,5	4	16-045-5
16-041-5	M5	20	10	4	5,5	20	6	2,5	4 - 6	6-12	12 -14	6,5	4	16-045-5
16-041-5	M5	20	10	4	5,5	22	6	2,5	6 - 8	8-14	14 -16	6,5	4	16-045-5
16-041-5	M5	20	10	4	5,5	26	6	2,5	8 -12	12-16	16 -18	6,5	4	16-045-5
16-041-6	M6	24	12	4,8	6,5	24	8	3	3 - 6	6-13	13 -16	8	5	16-045-6
16-041-6	M6	24	12	4,8	6,5	26	8	3	6 - 8	8-16	16 -18	8	5	16-045-6
16-041-6	M6	24	12	4,8	6,5	30	8	3	8 -12	12-18	18 -22	8	5	16-045-6
16-041-6	M6	24	12	4,8	6,5	34	8	3	12 -16	16-22	22 -26	8	5	16-045-6
16-041-8	M8	30	16	6,5	8,5	30	10	4	4 - 8	8-16	16 -20	9	6	16-045-8
16-041-8	M8	30	16	6,5	8,5	34	10	4	8 -12	12-20	20 -24	9	6	16-045-8
16-041-8	M8	30	16	6,5	8,5	38	10	4	12 -16	16-24	24 -28	9	6	16-045-8
16-041-8	M8	30	16	6,5	8,5	42	10	4	16 -20	20-28	28 -32	9	6	16-045-8

Exemple
de commandeRéférence - l₁**16-041-4-15**

composants.emile-maurin.fr

EMILE MAURIN
ELEMENTS STANDARD MECANIQUE